




FlexiRun® COLD1

Self-repairing high speed door

Ideal for high performance temperature

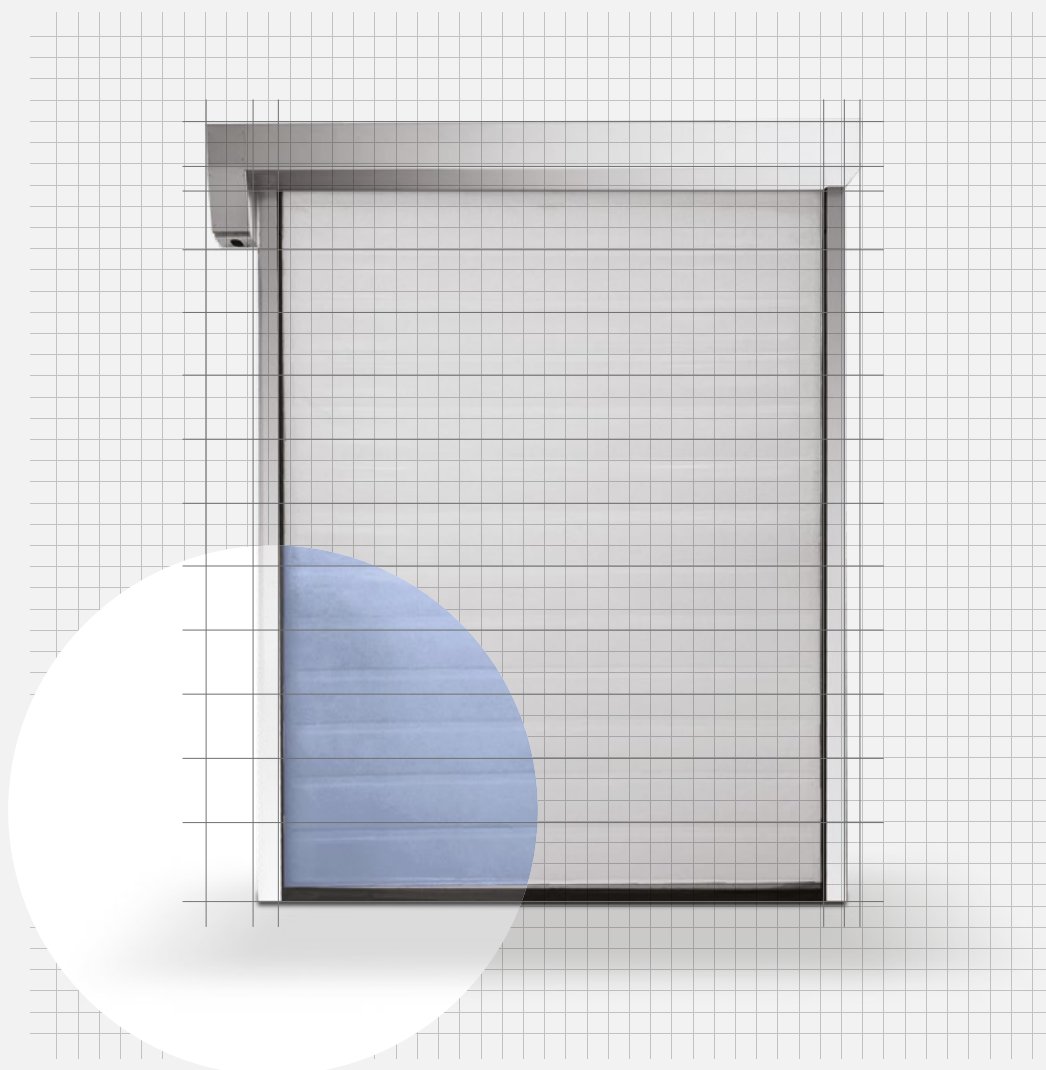

EN 12604



Speed
2,0 m/sec



Self-repairing



Thermal
insulation



Insulated
curtain



Low
maintenance



Low
temperatures



Energy
saving



Food
Industry

Description

The **FlexiRun®COLD1** high-speed roll-up door is an excellent solution for industries in the food sector, high-performance cold rooms, warehouses and in general for all those environments where there is a need for extreme temperature control. The door automatically reinserts itself in the guides if the door comes out following a knock.

Optionals

COMPLETE ANTI-RUST SOLUTION: Door frame along with motor cover and control cabinet, may be supplied in SS AISI 304 or 316.

INFORMATIVE SERIGRAPHY & LOGOS: A company logo or wording may be imprinted for advertising, information or warnings.

Features

Very high thermal insulation performance made of "double sheet with closed cell elastomer insulation"

Automatic repositioning system of the curtain in case of impact, wide range of accessories supplied in the standard configuration: fabric jamming sensor, reflection photocells for the insulated curtain, pair of safety photocells, IP67 multi-beam barrier, emergency STOP button, manual crank opening system.

Inverter for and speed adjustments, simple connections thanks to pre-wiring, opening speed up to 2.0 m/sec.

STANDARD COLORS

